
ELEIKO SVR PLATFORM retrofit

small and large





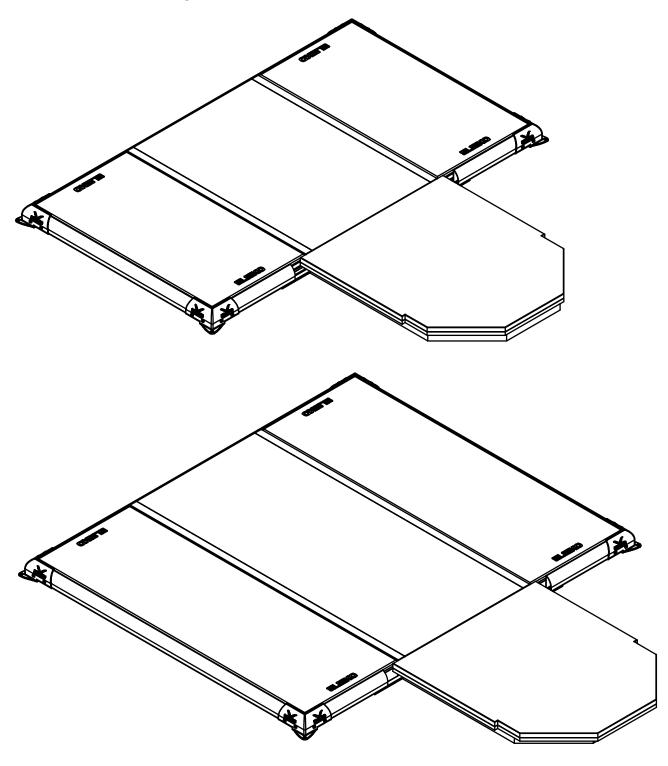

READ BEFORE INSTALLATION AND USE

CAUTION

The equipment must be installed and used in a place whose access and supervision are specifically controlled by the owner.

Be sure to install the equipment on a stable base and properly level the equipment.

SAFETY INSTRUCTIONS

It is the responibility of the purchaser of ELEIKO products to instruct all users and supervising personnel on proper usage of the equipment.

- 1. All included warnings (labels) and instructions **MUST** be read before the use of any ELEIKO-equipment. Use each equipment as it is intended for.
- **2.** A user **MUST** get a medical examination and proper instructions before the use of any ELEIKO-equipment.
- **3. DO NOT** let anyone, under any cuircumstances, use equipment that appears to be damaged. Do not try to repair any equipment before consulting an ELEIKO technician.
- **4. DO NOT** replace the components of ELEIKO-equipment with other non ELEIKO-equipment (magnetic safety pin, frames, bars), do not improvise. If there are any doubts consult an ELEIKO representative prior to any intervention.
- **5. DO NOT** overload the equipment and **DO NOT** try to exceed personal strength levels.
- **6.** Children and teenagers must be supervised by a knowledgeable adult.
- **7. DO NOT** remove any safety labels from the ELEIKO-equipment. ELEIKO is not responsible if a label is removed. Replace damaged labels immediately.

PREVENTITIVE MAINTENANCE & INSPECTIONS

Regularly:

Clean the surfaces on frames and tubes from dust and dirt. Vaccum clean rubber tiles. Check that all bolts between parts and floors are properly tightened, according to recommendations.

WARRANTY

Tubings and corners: 3 years

Foam, wooden deck, rubber tiles: 1 year

Normal wear and tear does not fall under the warranty.

ADDITIONAL INFORMATION

This equipment is for indoor use only.






PRODUCT SPECIFICATION


Weightlifting training platform. For indoor use only.

Product weight from	240 kg / 530 lbs
Dimensions	See below. Height 105 mm / 4.1 in

FOOTPRINT AND FREE AREA

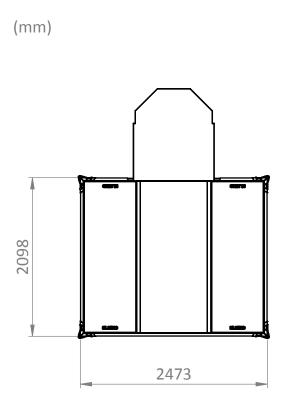


Add sufficient clearance, not less than 1.5 m (59 in), on all sides.

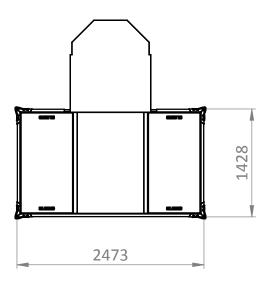




CONTENTS for SMALL version

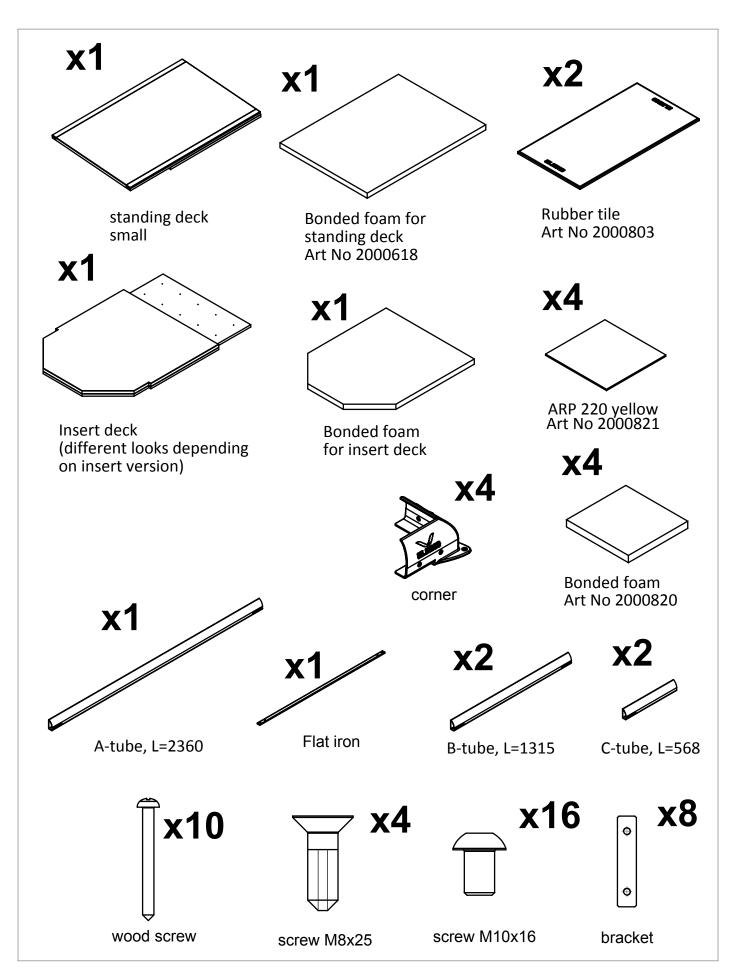




CONTENTS for LARGE version

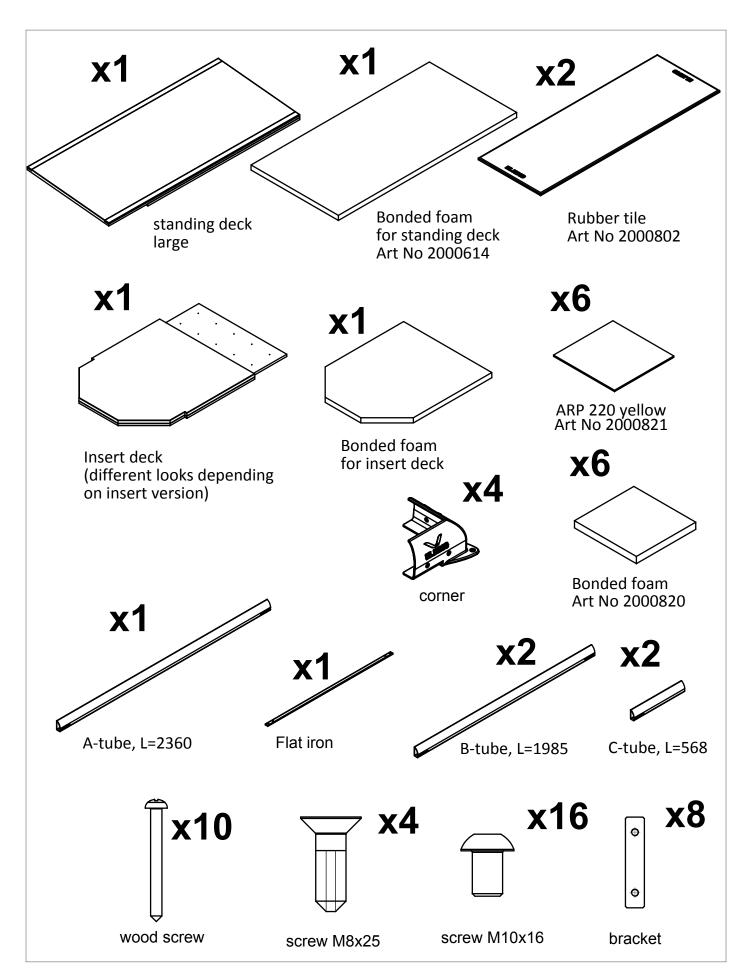


REQUIRED TOOLS





ASSEMBLY INSTRUCTIONS

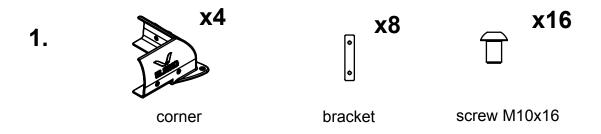


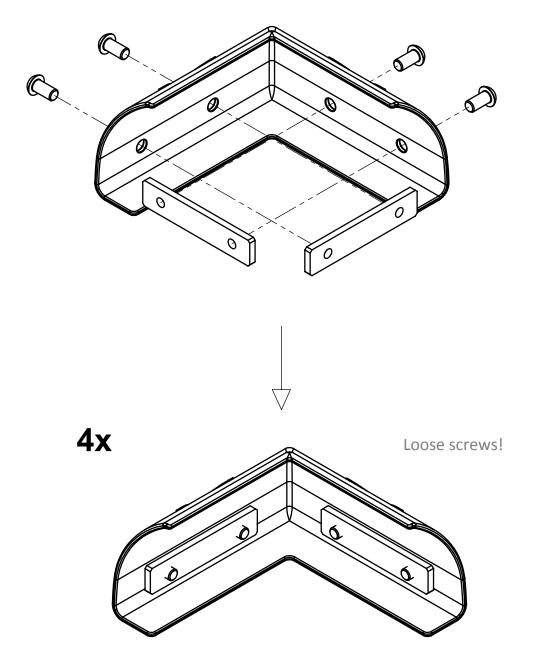





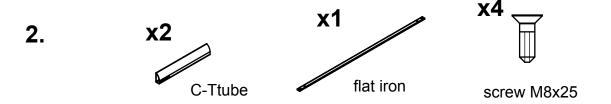


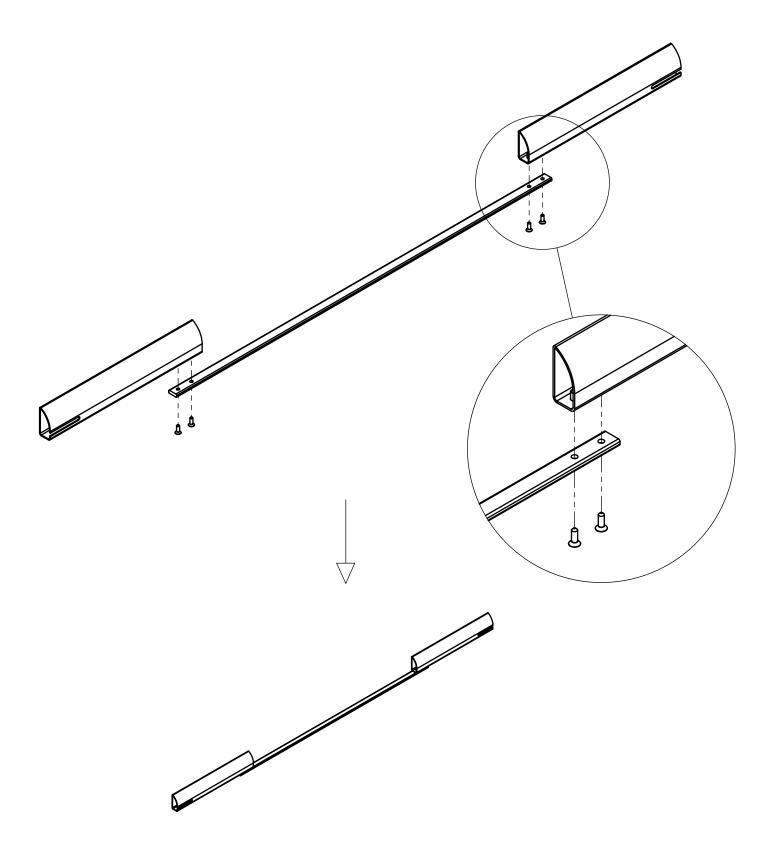

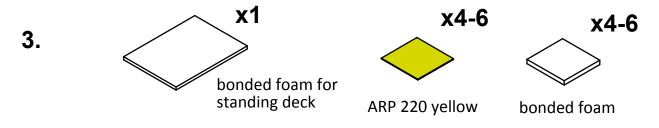


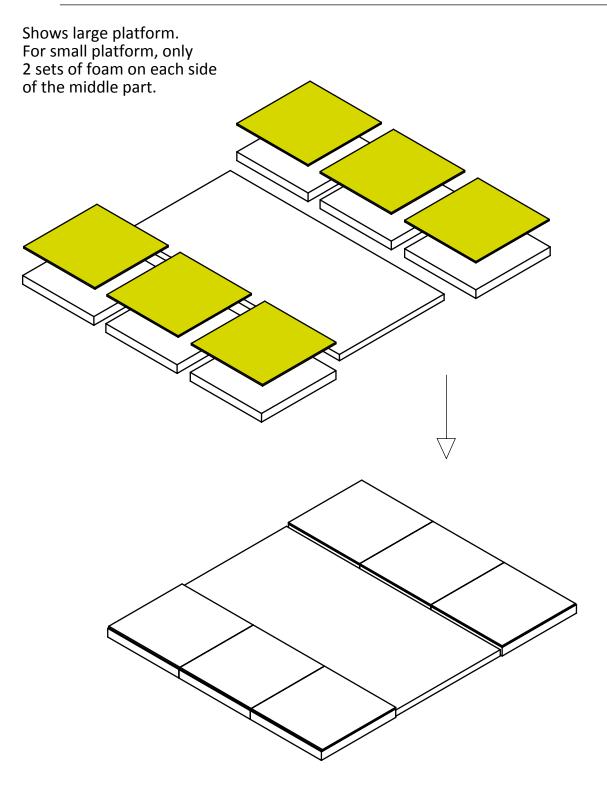

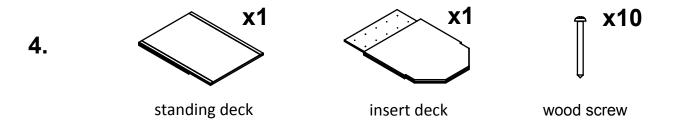


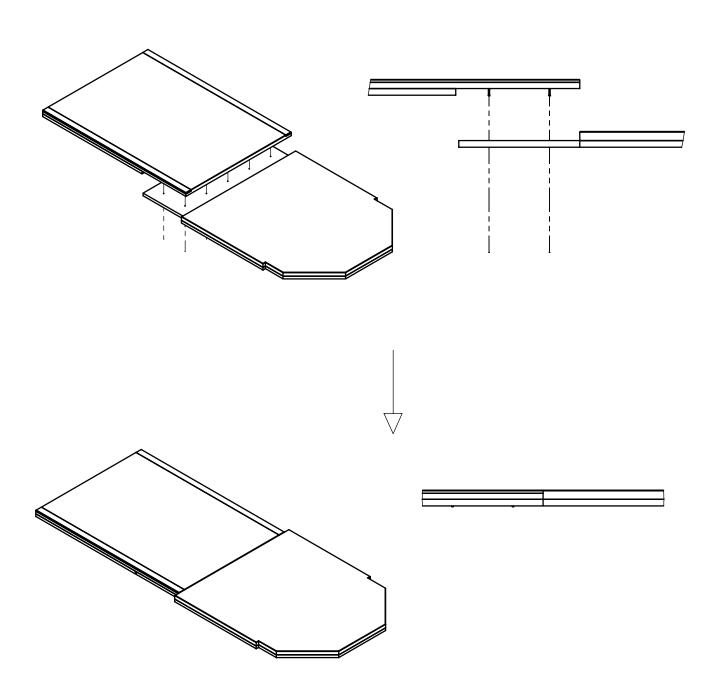




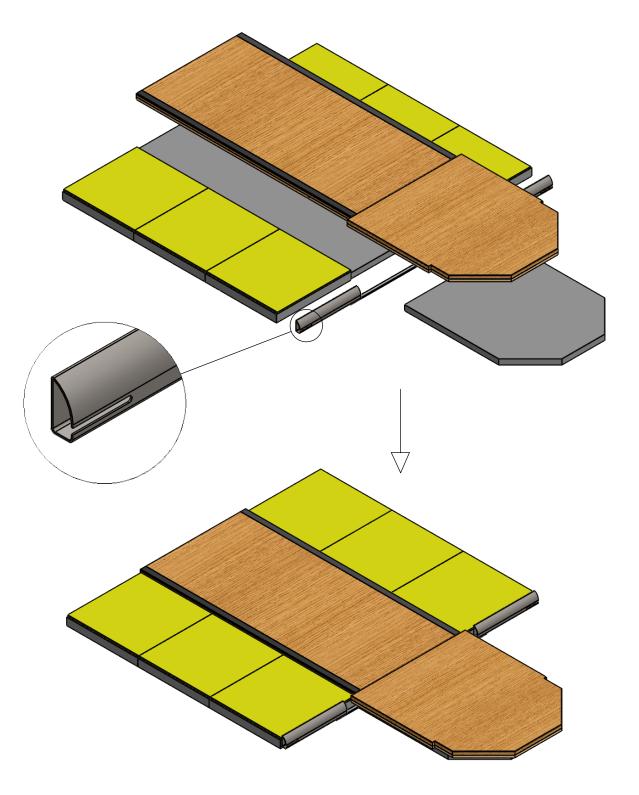



6.




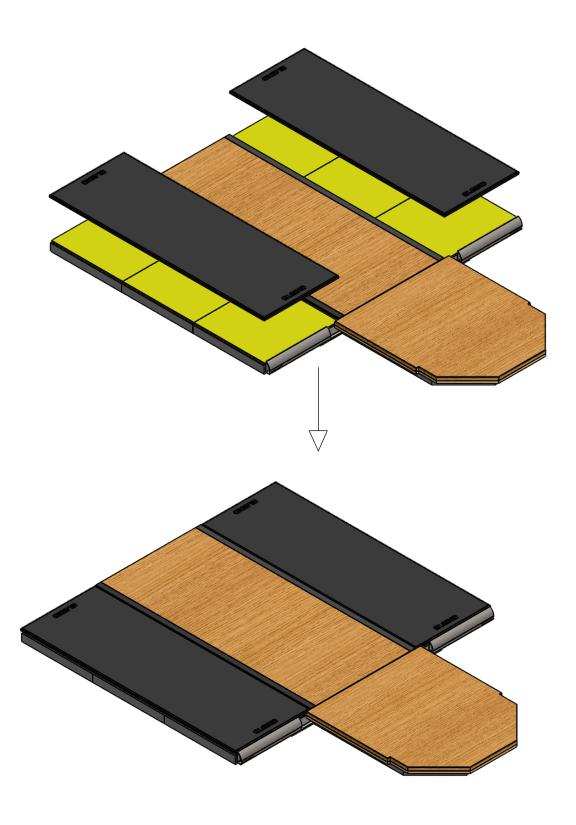











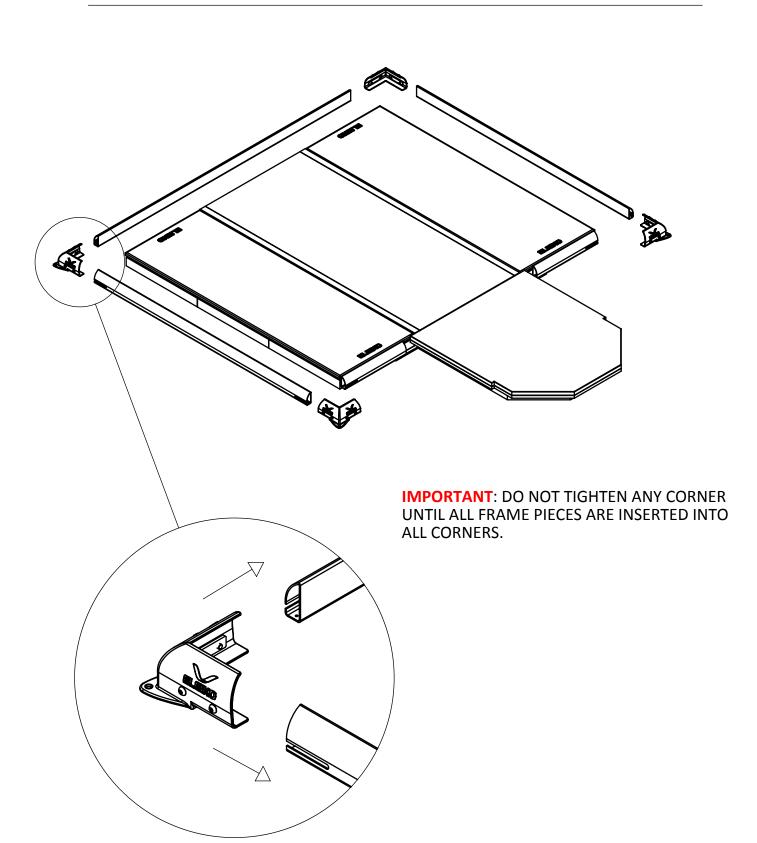

8.

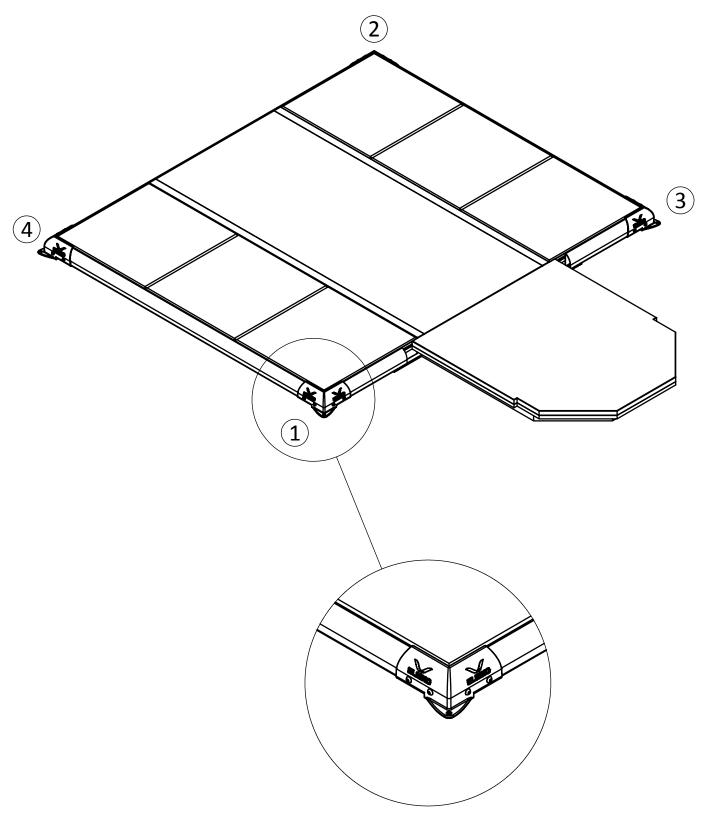

IMPORTANT: TIGHTEN FRAME AND SCREW IN ORDER SHOWN IN DIAGRAM, 1-2-3-4 (CRISS CROSS PATTERN). MAKE SURE TO PUSH THE OTHER END OF TUBE TO MAKE THE FRAME TIGHT.



